



VOLVO 265



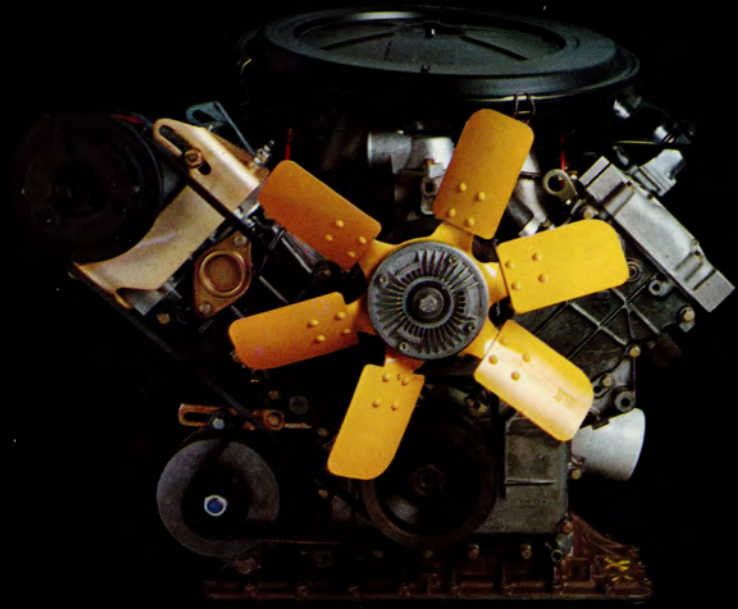

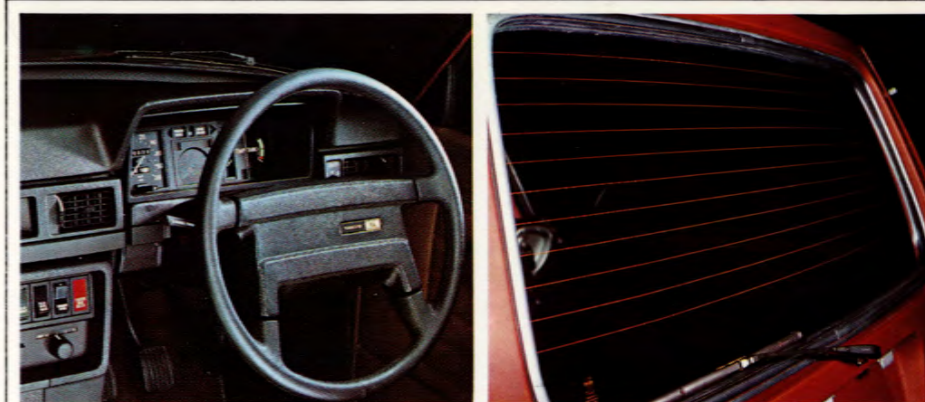

Everything in the Volvo 265 DL is ideally placed, with the most important features getting priority. A comprehensive system of warning and reminder lights includes "fasten seat belts" and "brake failure" tell-tales.

The extremely efficient heating and ventilation system has twelve outlets and is conveniently controlled from the centre console.

The steering wheel of the precise and responsive rack and pinion steering system has a padded hub. The turning circle is a tight 32 ft. 2 in./9.8 m, and that's a lot better than many small cars manage.

The Volvo 265 DL has big windows for excellent all-round visibility, electric windscreen washers and two-speed wipers.

The tailgate extends all the way up to the roofline, has its hinges on the outside for easy loading and an electrically heated window with its own wiper and washer. With the rear seat folded down, the Volvo 265 DL has a totally flat cargo deck which is 74 in./188 cm. long.

The tailgate opening is 45.7 in./116 cm. wide and 30.7 in./78 cm. from floor to roof. To load the Volvo 265 you only have to lift things 23 in./59 cm. off the ground — which means even heavy loading is an easy matter.

Volvo 265 DL

You're looking at the latest member of Volvo's six-cylinder Series. With all the refinements and appointments, comfort, power and safety of the Volvo 264. And in addition – a maximum of cargo-carrying capacity.

The Volvo 265 DL is designed and built for the discerning motorist and to maintain the standards set for all Volvos: Durability, safety and economy of operation. To own one is to know that you drive a car with plenty of open road power resources and the qualifications and manoeuvrability to make town driving child's play. This, probably one of the most exclusive station wagons ever built, has that elusive quality of combining motoring luxury with utilitarian carrying capacity.

It is powered by a whisper-quiet V6 aluminum-alloy engine with overhead

camshafts and a solid-state contactless ignition system, a fuel injection system of CI type and an output of 140 hp DIN – power enough for exhilarating performance even when it's fully loaded.

If ever there was an up-to-town and down-to-earth car, the Volvo 265 DL is it. The extended roofline, near vertical sides, totally flat cargo deck and the enormous tailgate give a fantastic amount of easily used space. With five in the car, there is still room for 55 cu.ft./1.5 m³ of things and by simply folding down the rear seat you can increase this amazing cargo capacity to 67 cu.ft./1.9 m³.



SPECIFICATIONS

Transmission

Fully automatic three-stage transmission. Illuminated six-position selector.

Suspension

Front: spring strut type with stabilizer. Rear: live, carried in rubber-mounted control arms and torque rods, transverse location by track rod.

Wheels and tyres

Steel-braced radial ply tyres dimension 185 SR 14 on 5.5J-14" rims.

Braking system

Power-assisted, all disc dual circuit, triangle-split system. Each circuit operates simultaneously on both front wheels and one each of the rear wheels. Relief valves prevent premature rear wheel lock up in emergency situations. Master cylinder of stepped-bore type. Copper-alloy brake pipes throughout.

Instrumentation

Housed in padded safety dashboard. Rheostat-controlled instrument lighting, selected controls have concealed lighting. Six-figure mileometer with trip meter. Fuel gauge. Coolant temperature gauge. Warning lamps for: charging, oil pressure, turn indicators,

main beam, handbrake application, brake circuit failure and bulb integrity sensor. Illuminated glove box. Combined steering and ignition lock. Quartz clock.

Centre console: switches for electrically heated rear window, four-way hazard warning lights, electrically operated front side windows. Also: controls for heating and ventilation system, "fasten seat belts" reminder, cigarette lighter and ashtray. Radio compartment.

Other standard equipment

Combined stalk for turn indicators, main and dipped beam with headlight flasher. Combined stalk for two-speed windscreen wipers and electric windscreen washers. Rectangular halogen headlights with separate reflectors for main and dipped beams. Automatic reversing lights. Head restraints and inertia reel front seat belts. Anchorages for rear seat belts. High impact laminated windscreen. Padded sun visors. Day/night interior rear-view mirror of safety type. Two outer door mirrors. Fully carpeted. Storage pockets in front doors. Engine compartment lighting and courtesy lamp beside tailgate. Tailgate window wiper and washer.

Engine

Designation	B 27 E
Number of cylinders	6
Displacement, cm ³	2664
Bore x stroke, mm	88.0 x 73.9
Max output hp at r/m DIN	140/6000
Max output kW at r/s DIN	103/100
Max torque kpm at r/m DIN	20.8/3000
Max torque Nm at r/s DIN	204/50
Compression ratio	8.7:1
Carburation	Fuel injection, CI system
Fuel octane rating	93
Engine block and cylinder heads	Aluminium alloy
Valve system	Overhead camshafts. Rocker arms.
Camshaft transmission	Chain

Cooling system

Sealed and frost-proofed. Capacity approx. 2.4 Imp. galls./10.9 litres

Electrical system

Battery	12 V/70 Ah
Alternator rating	55 A
Ignition system	Contactless, electronic

Fuel tank

Safety location beside rear axle, below rear underbody. Capacity approx. 13.2 Imp. galls./60 litres

Steering gear

Rack and pinion. Safety steering column of telescopic type. Ratio	17.1:1
Number of turns lock to lock	3.5 Power assisted.

Exterior dimensions

Overall length	193 in./4898 mm
Overall width	67.2 in./1707 mm
Overall height	57.5 in./1460 mm
Wheelbase	104 in./2640 mm
Track, front	56 in./1420 mm
Track, rear	53.1 in./1350 mm
Turning circle diameter, between kerbs	32 ft. 2 in./9.8 m

Interior dimensions

Headroom, front	37.4 in./950 mm
Headroom, rear	37.4 in./950 mm
Seat width, front:	
Shoulder height	54.3 in./1380 mm
Hip height	56.3 in./1430 mm
Rear seat width:	
Shoulder height	53.1 in./1350 mm
Hip height	56.3 in./1430 mm
Front seat depth	18.5 in./1470 mm
Front seat width	22.0 in./560 mm

Cargo area dimensions


Tailgate opening, max width	45.7 in./1160 mm
Max height	30.7 in./780 mm
Loading height	23.2 in./590 mm
Max width, cargo area	55.9 in./1420 mm
Max length	74 in./1880 mm
Max height	32.9 in./835 mm
Volume, rear seat in use approx.	53 cu. ft./1.5 cu. m.
Volume, rear seat folded approx.	67 cu. ft./1.9 cu. m.
Volume, concealed cavity approx.	2.3 cu. ft./65 cu. dm.

Weights

Kerb weight approx. 3087 lb./1400 kg.
Gross weight 4299 lb./1950 kg.

Warranty

12-month warranty irrespective of mileage

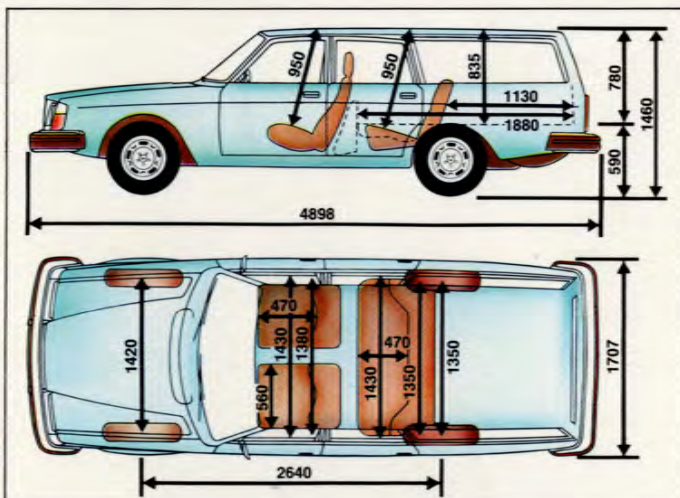

The factory reserves the right to make changes at any time, without notice, to prices, colours, materials, equipment, specifications and models and also to discontinue models.

VOLVO